

OSFHU Passive Infrared Fixture Mount High Bay Occupancy Sensor



BASIC OPERATION

The High Bay Occupancy Sensor is designed simply to automatically turn lights ON or OFF. The sensor utilizes Passive Infrared Technology (PIR) combined with Fresnel Lenses to determine when an area is occupied. This is determined when a heat source is detected and moves from one facet in the lens to another. The sensor recognizes this as motion and provides power to the light fixture. Simultaneously a timer is started and restarts with each motion, once expired, the lights will turn OFF.

The high bay sensor maximizes energy savings, incorporating false detection algorithms to eliminate false ON's by nuisance tripping or background environmental conditions. The sensor also optimizes energy savings and safety concerns during power loss scenarios by assuming a return to last known state of operation.

APPLICATIONS

The OSFHU High Bay Occupancy Sensor is specifically designed and assembled to reduce the amount of labor required during the fixture assembly process and at time of installation. These sensors are for use in spaces where ceiling heights can vary from 8 to 40 feet, such as warehouses, manufacturing facilities, production, industrial area, and all other high ceiling applications.

It comes with three interchangeable lenses for use in either a 360° high-bay or 360° low-bay general area or an aisle way. The OSFHU provides reliable coverage up to 40 ft. mounting heights. The OSFHU is also available in a model for cold storage applications with temperatures as low as -40° F.

INSTALLATION

The OSFHU mounts directly to an industrial fluorescent fixture or an electrical junction box through a standard 1/2" knockout using the provided lock-nut. Wiring is connected inside the fixture body. To improve the field-of-view for deep body fixtures, a separate offset adaptor accessory (OSFLO or OSFOA) can be used to position the sensor below the fixture body. The adapter simply snaps into a 1/2" knockout on the end of the industrial fixture to attach the sensor. The OSFHU and OSFLO/OSFOA provides the most labor savings available with quick snap, 42" wire leads, and no power required to configure.

PRODUCT DATA

FEATURES

Quicksnap: built into the 1/2" nipple, this locking mechanism allows for the fastest and easiest mounting not requiring a threaded lock-nut

Reduce time and materials: easily reach the ballast at either end of the fixture without requiring more wire or connectors with the included 42" wire leads

Fast, easy time delay setting: can be set at any time without requiring power to the sensor; time delay is variable from 30s-20m

Instantly verify fixture operation and wiring connections: "instant ON" closing relay fires lamps in under 5 seconds

High Inrush Stability (H.I.S. Technology):


- Zero crossing circuitry optimizes relay operation for reliable, long-life operation
- Robust mechanical latching relay is durable for all load types

Auto temperature calibration: automatically adjusts the PIR sensitivity as ambient temperature rises to increase detection of heat movement through the field-of-view




Return to last state: for safety and energy savings, the OSFHU contains a latching relay so that in the event power is lost to the device, the device will return to the last known state of the relay

False detection intelligence: for increased energy savings and to mitigate nuisance tripping, the super bright LED indicates advanced detection has been activated and the lights will only turn ON when true occupancy has been determined

ASSEMBLY WITH OFF-SET ADAPTOR

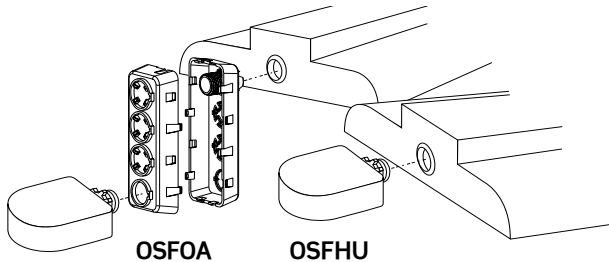



FIELD-OF-VIEW

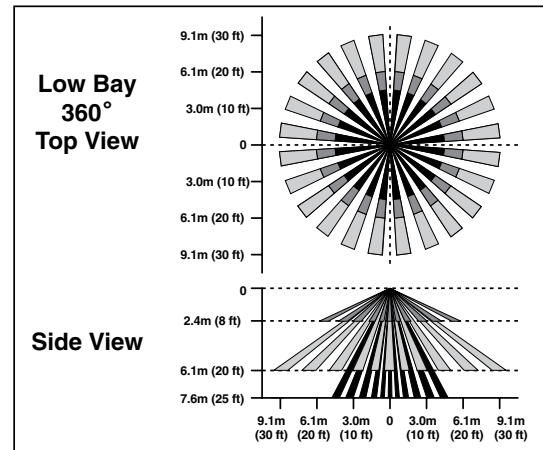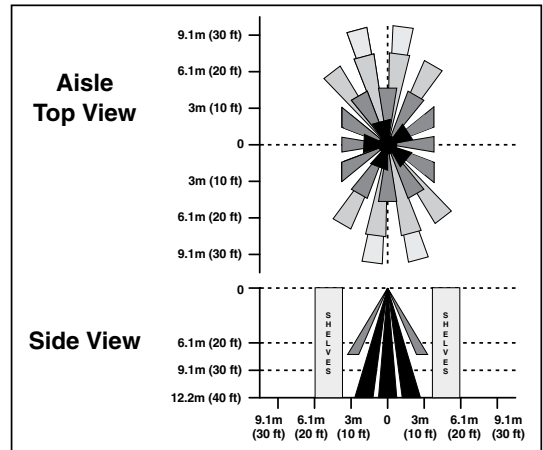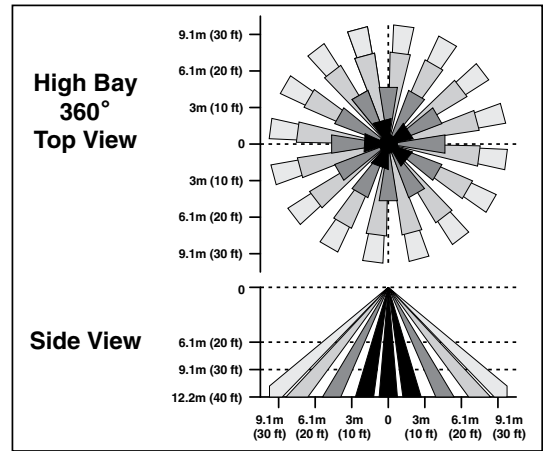

SPECIFICATIONS

ELECTRICAL	
Input Voltage	120-230-277-347VAC; 240/480VAC (-14W models)
Operational Frequencies	50/60Hz
Load Rating	800VA @ 120VAC Ballast 1200VA @ 277VAC Ballast 1500VA @ 347VAC Ballast 2000VA @ 480VAC Ballast Motor: 1/4 HP Load @ 120V
Standby Power Consumption	120V - 130mW - .13W 277V - 450mW - .45W 347V - 460mW - .46W
Time Delay	30 seconds-20 minutes (factory set to 30 sec - no power required to set)
Wire Designation	-ITW/-CTW models: Line-Black, Load-Red, Neutral-White -14W/-C4W models: Line-Black, Load-Red, Load-Red
ENVIRONMENTAL	
Operating Temperature Range	14° F to 160° F (-10° C to 71° C)
Cold Storage Operating Temperature Range	-40° F to 160° F (-40° C to 71° C)
Storage Temperature Range	-14° F to 160° F (-25° C to 71° C)
Relative Humidity	20% to 90% non-condensing
PHYSICAL	
Dimensions	OSFHU: 3.50" H x 3.50" W x 1.25" D OSFOA: 5.50" H x 2.00" W x 2.00" D OSFLO: 4.325" H x 2.00" W x 2.00" D
Construction	High-impact, injection molded plastic housing
Color	White
OTHER	
Agency Listings	UL and CUL Listed (OSFHU models)
Warranty	Limited 5-Year

WIRING DIAGRAM

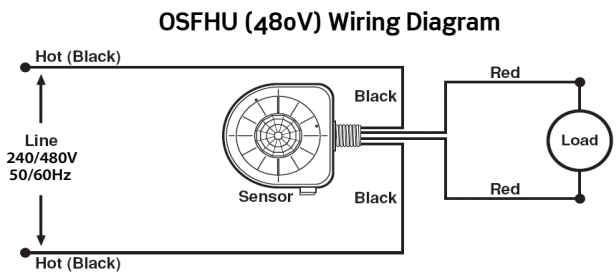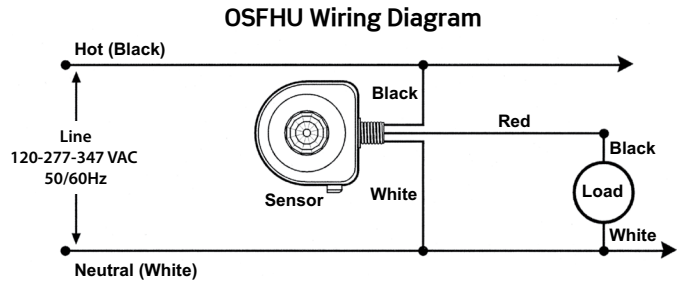

ORDERING INFORMATION

CAT. NO.	DESCRIPTION
OSFHU-ITW	PIR Fixture Mount High Bay Sensor with 3 Interchangeable Lenses, White
OSFHU-CTW	PIR Fixture Mount High Bay Sensor with 3 Interchangeable Lenses for Cold Storage, White
OSFHU-14W	PIR Fixture Mount High Bay Sensor with 3 Interchangeable Lenses, 480V, No Neutral, White
OSFHU-C4W	PIR Fixture Mount High Bay Sensor with 3 Interchangeable Lenses for Cold Storage, 480V, No Neutral, White
OSFOA-ooW	Offset Adapter Accessory for OSFHU, 3 Position, White
OSFLO-ooW	Offset Adapter Accessory for OSFHU, 1 Position, White
OSFCG-ooW	Protective Cage for Fixture Mounted Sensors

NAFTA and Made in USA models available.

Leviton Mfg. Co., Inc. Lighting & Energy Solutions

201 N. Service Rd. Melville, NY 11747-3138 Tech Line: 1-800-824-3005 Fax: 1-800-832-9538 www.leviton.com/les
© 2011 Leviton Manufacturing Co., Inc. All rights reserved. Subject to change without notice.

Leviton Manufacturing Co., Inc. Lighting & Energy Solutions

201 N. Service Rd. Melville, NY 11747-3138 Tech Line: 1-800-824-3005 Fax: 1-800-832-9538 www.leviton.com/les

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 • Telephone: 1-800-469-7890 • FAX: 1-800-563-1853

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 • Tel. (+52) 55-5082-1040 • FAX: (+52) 5386-1797 • www.leviton.com.mx

Visit our Website at: www.leviton.com/les

© 2011 Leviton Manufacturing Co., Inc. All rights reserved. Subject to change without notice.