

PRODUCT DESCRIPTION

Brandon series architectural linear LED suspension lighting fixtures bring direct and indirect light to commercial LED or residential lighting interiors. Our sleek, stylish fixtures are highly effective and efficient lighting solutions for hotels, offices, retail outlets, restaurants, and more. Our Linear suspended Lights are a stylish alternative to downlights. Linear suspended lights can create a functional yet relaxing atmosphere and provide an even wash of light within a space.


Our Linear Lighting can be customised to your desired length, look & colour temperature and can either be suspended, surface mounted or recessed to suit your needs. Linear lights are available to be dimmed and the colour temperature can be interchangeable to allow for maximum functionality.

FEATURES:

- Surge protector
- White painted parts are treated with a five-stage phosphate bonding process and finished with high reflectance baked enamel
- Low profile design optimizes shipping, storage, and handling
- Meets current lighting demands for computer screens meeting low brightness/glare control needs
- Performance engineered optical lens assembly delivers unique beam angles and reduces glare.
- High quality LED Chips provide high efficiency heat dissipation, stability, and lumen maintenance
- Driver disconnect provided where required to comply with US and Canadian codes
- Designed to be suspended (aircraft cable or stem kits)
- Class II driver, with 0-10V or Triac dimming

APPLICATIONS:

- Closets/Storage rooms/Offices
- Conference rooms/Retail
- Reception areas/Hallways
- Education facilities
- Parking Garages

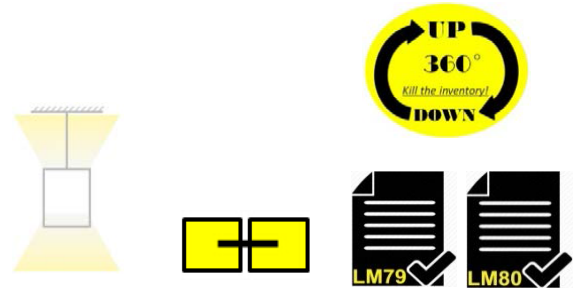

| OPTIONS: | Order Code |
|-------------------------|------------|
| AC347-480V High Voltage | 347V |
| Occupancy Sensor | OS |
| Daylight Harvesting | DH |
| Emergency Backup | EM |
| CCT 3000K,4000K,5000K | 30/40/50 |
| Suspension Chain | SC |
| Stem Kits | SK |
| Power Cord | PC |



ORDERING: (KK=CCT, can be 30,35,40,45,50,55)

| Item | Watts | Efficacy | Lumens | CRI | PF | Voltage | Dimension(L*W*H):Inch | | |
|-------------------|-------|----------|--------|-----|-------|----------|-----------------------|----|-------|
| MX834GLM04014BKKW | 40W | 110lm/w | 4400lm | >82 | >0.95 | 120-277V | 49 2/8 | 11 | 2 6/8 |
| MX834GLM06014BKKW | 60W | 110lm/w | 6600lm | >82 | >0.95 | 120-277V | 49 2/8 | 11 | 2 6/8 |

*Please contact your Brandon representative to order products that don't have order codes listed here or any info required. Specification and dimension subject to change without notice.