

PRODUCT DESCRIPTION

The MX453D Series corridor strip lens features economy and energy efficient performance. This luminaire utilizes a low brightness, extruded opal lens for dependable performance and good looks. This cost effective LED utility strip fixture is a commercial ceiling fixture that provides high uniformity, excellent efficiency and reduced glare. Use in a wide variety of applications such as open offices, private offices, conference rooms, reception areas, retail, hallways, industrial assembly, retail open areas and educational facilities. It is also an ideal complimentary wraparound luminaire for diverse applications requiring economical general lighting.

FEATURES:

- Surge protector.
- Low profile design optimizes shipping, storage, and handling.
- Durable heavy gauge cold roll steel construction coated with white.
- Quick release design for easy installation.
- Big polycarbonate milky lens diffuse wider uniform lighting distribution.
- PC end-cap solve the light leakage issue.
- Available for suspended by steam cable, surface mounted and connective in a long row.
- High quality LED Chips provide high efficiency, heat dissipation, stability, and lumen maintenance.
- CCT select is available for saving cost.
- Driver disconnect provided where required to comply with US and Canadian or CE codes.
- Exceptional efficacy meets DLC Premium requirements.
- Integrated smart sensor box and emergency battery are optional.
- Multi-volt 0-10V driver for continuous dimming.
- Ambient Temperature: -30°C~ 40°C (-22F to +104F)
- Damp Location Rated

APPLICATIONS:

Corridor/Storage rooms/Offices
Conference rooms/Retail
Reception areas/Hallways
Parking Garages



OPTIONS:	Order Code
AC347-480V High Voltage	347V
Occupancy Sensor	OS
Steel Wing	SW
Emergency Backup	EM
CCT 3000K,3500K,4000K,5000K	30/35/40/50
Continuous Row Joiner	JO
Suspension Chain	SC



ORDERING: (KK=CCT, can be 30, 35, 40, 50)



Item	Watts	Efficacy	Lumens	CRI	PF	Voltage	Dimension(L*W*H):Inch		
MX453DLM02012BKDXW	20W	125lm/w	2,500lm	>80	>0.95	120-277V	23 3/8	3	3 3/8
MX453DLM03014BKDXW	30W	125lm/w	3,750lm	>80	>0.95	120-277V	45 7/8	3	3 3/8
MX453DLM06018BKDXW	60W	125lm/w	7,500lm	>80	>0.95	120-277V	91 5/8	3	3 3/8

* Please contact your Brandon representative to order products that don't have order codes listed here or any info required.


* Due to continuing product improvements, Brandon Lighting reserves the right to change the specifications without notice.



Illustration

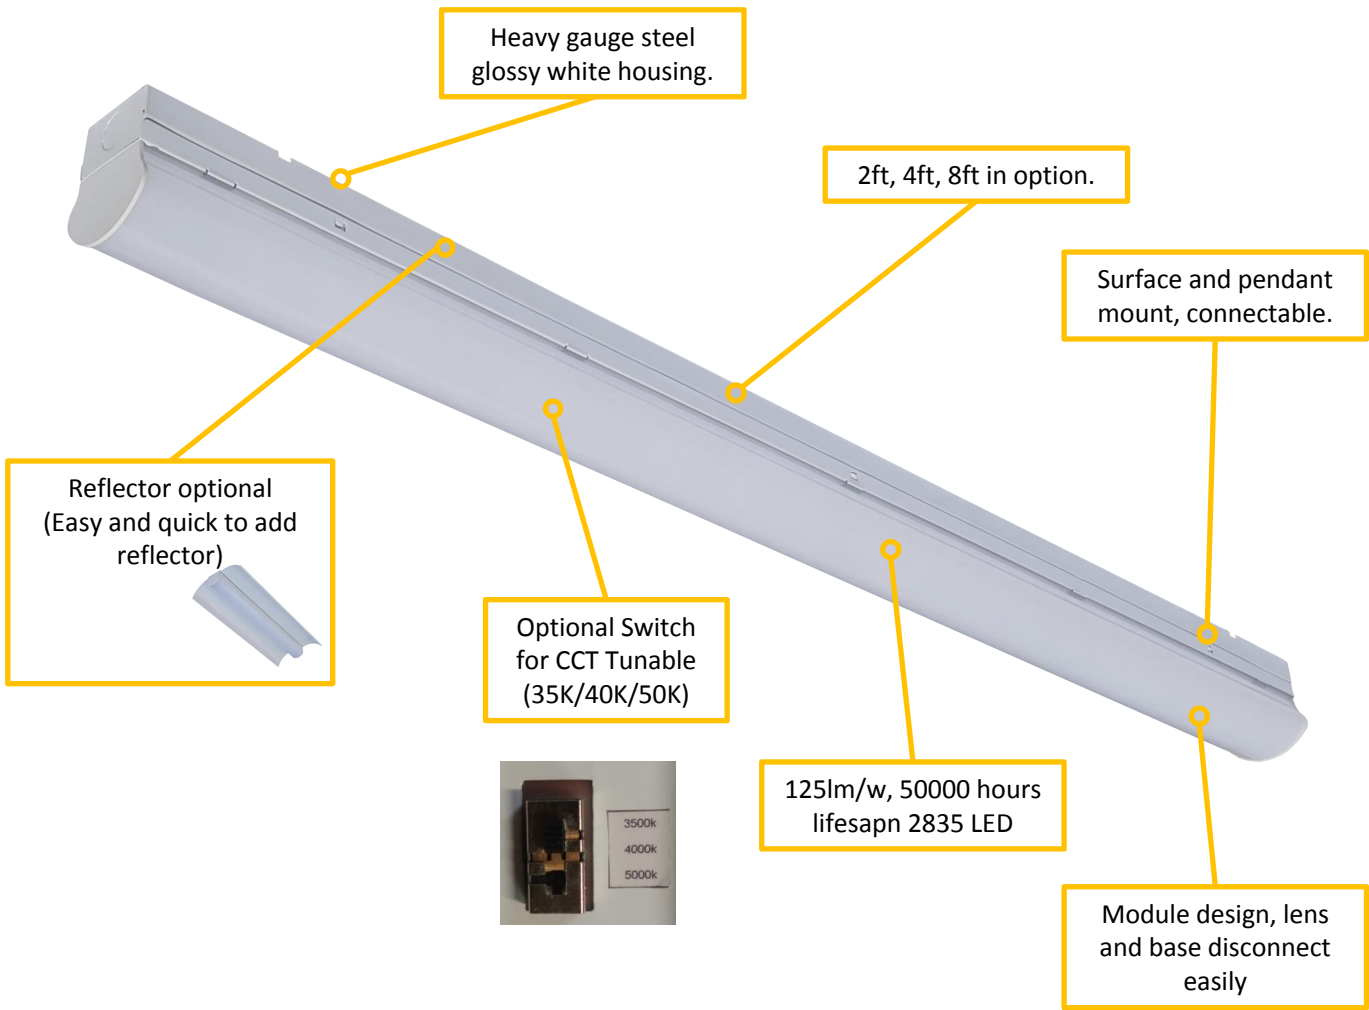

Installation Dimension

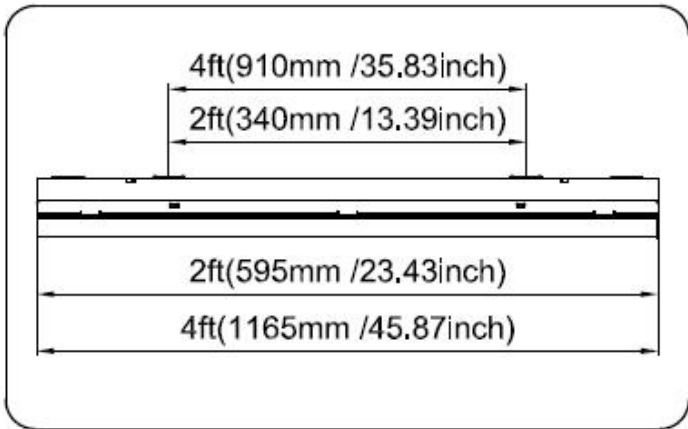

Installation

