


FEATURES:

- Surge protector.
- White painted parts are treated with a five-stage phosphate bonding process and finished with high reflectance baked enamel.
- Low profile design optimizes shipping, storage, and handling.
- Meets current lighting demands for computer screens meeting low brightness/glare control needs
- Performance engineered optical lens assembly delivers unique beam angles and reduces glare.
- High quality LED Chips provide high efficiency, heat dissipation, stability, and lumen maintenance.
- Driver disconnect provided where required to comply with US and Canadian codes.
- Designed to be suspended (aircraft cable or stem kits)
- Class II driver, with 0-10V or Triac dimming
- 50,000+ Hours LED Life Expectancy.
- 5 Year Warranty.
- Power factor: >0.9.
- Ambient Temperature:-30 ~ 40 °C (-22° F to +104° F)
- Damp Location Rated
- CCT tunable optional(35K 40K 50K in one fixture)
- Slide Switch for CCT adjustable with 3 stops
- Direct & Indirect Lighting Ratio adjustable

APPLICATIONS:


Storage rooms/Offices
Conference rooms/Retail
Reception areas/Hallways
Education facilities



5 YEARS



50,000H



82 CRI(Ra)



INSTANT ON



WIDE BEAM



Dimmable DC 0-10V



CERTIFIED

Ordering information

Item	Watts	3CCT	Efficacy	Lumens	Dimension(L*W*H):Inch		
AR834GLM04014BVKDXW	40W	35K 40K 50K	90-100 lm/w	3,600 lm ~4000 lm	48.23	10	2.2
AR834GLM06014BVKDXW	60W	35K 40K 50K	90-100 lm/w	5,400 lm ~6000 lm	48.23	10	2.2

*Please contact your Brandon representative to order products that don't have order codes listed here or any info required
Specification and dimension subject to change without notice.

ORDERING

Model	Color of Lens	Watts	Length	Mounting Method	CCT	Driver	Accessories
AR834G	LM-milky lens/perforati on cover LX-No lens LD-clear lens LL-Louver	040: 40W 060: 60W	14-4ft	B: Surface/ Suspended	30:3000K 35:3500K 40:4000K 45:4500K 50:5000K VK-CCT tunable	D1-120-277V D2-347V D3-120-347V D4-120-277V wattage selectable D5-120-347V wattage selectable D6-347-480V	A: No sensor&EM B: With Sensor C: With EM D: With Sensor&EM


CCT Tunable



3000K/3500K-Warm White


4000K-Nature White

5000K-Cold White

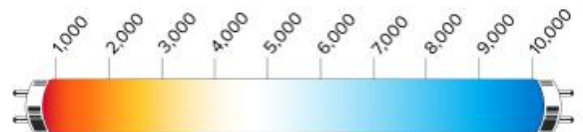


PHOTOMETRIC


Luminous Intensity Distribution Curve

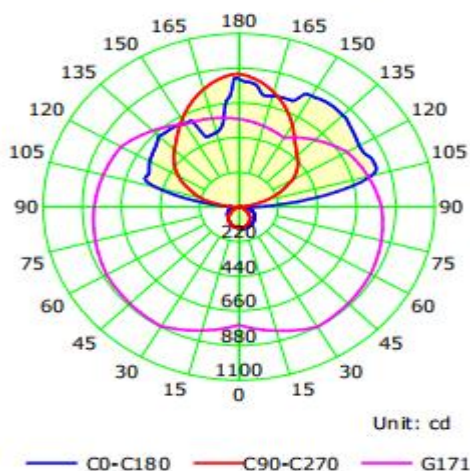


Luminaire	4000K
Input Voltage(VAC)	120-277
Power (W)	40.71
Delivered Lumen(Lm)	3390
Efficacy(Lm/W)	100
Beam Angle	H0.0V0.0
Power Factor(PF)	>92
Color Rendering Index(CRI)	>80

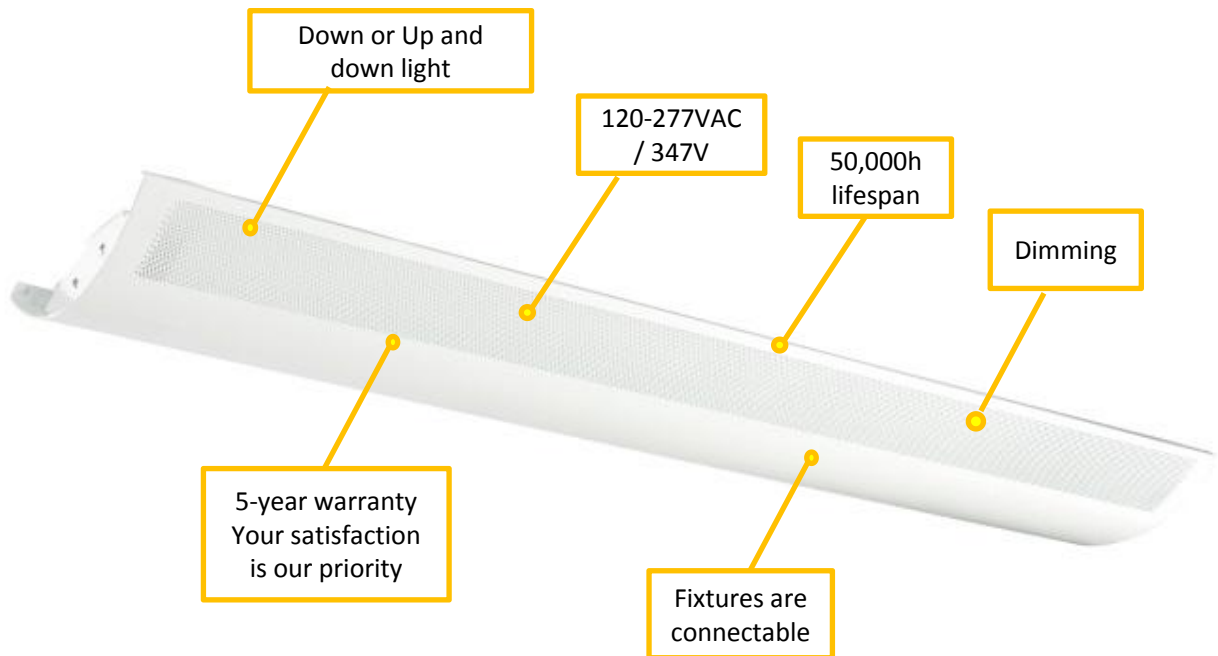


■ Installation Dimension

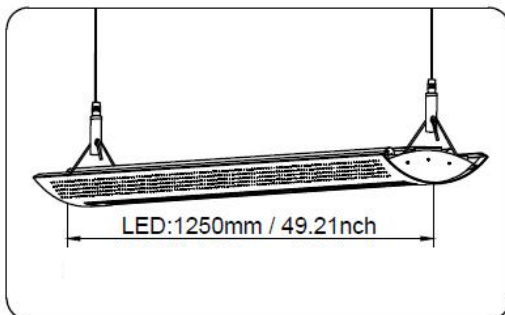

■ Suspended Mounting

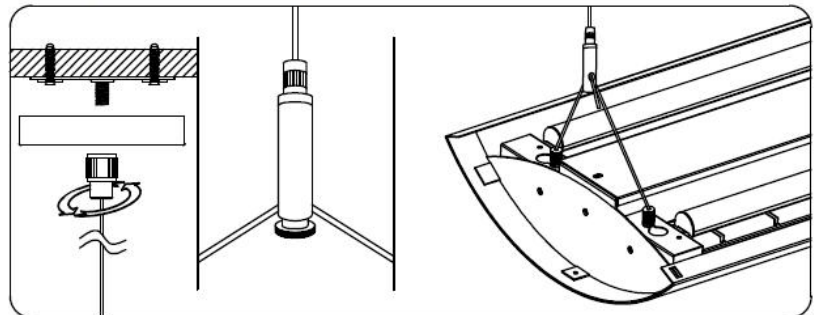

■ Product Profile

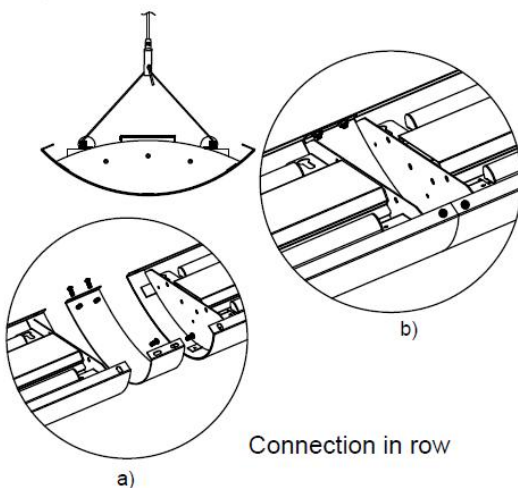


*Please contact your Brandon representative to order products that don't have order codes listed here or any info required

*Due to continuing product improvements, Brandon Lighting reserves the right to change the specifications without notice.

Accessories to be added separated

1. Sensor & Emergency kit

Recommended

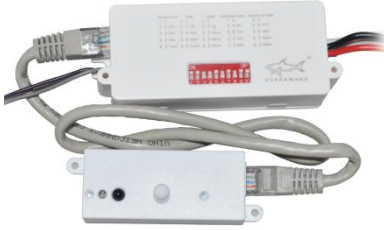

Internal Microwave
Motion Sensor BRI810-
B-M4



BRI819

Microwave PIR
BRI819





BLD-CM20E-4800800
Lithium Battery


2. Connection Kits



■ Product Profile



b)



a)

Connection in row